



pro audio

K series K403 K803 K163

Mid / High Unit System




K403/K803/K163 are full-range series column speaker with different unit configurations, featuring small size, light weight, high sensitivity, clear and bright sound, can be used alone and combined with K112B or K112BAS to form a system to meet the needs of different small and medium-sized places. Unit configuration: 4, 8, and 16 x 3" neodymium full range units. The cabinet is made of aluminum alloy.

K403/K803/K163是单元配置不同的全频系列音柱，具有体积小、重量轻、灵敏度高、声音清晰、明亮等特点，可单独使用，也可配合K112B或K112BAS组成系统，满足不同中小型场所使用需求。单元配置分别为：4只、8只、16只3"钕磁全频单元。箱体采用铝合金制作。

FEATURES

- Small size, light weight
- Clear and bright sound
- Aluminium alloy housing
- Various installation combinations
- Applications: conference rooms, multifunction halls, churches and small touring

CONFIGURATION

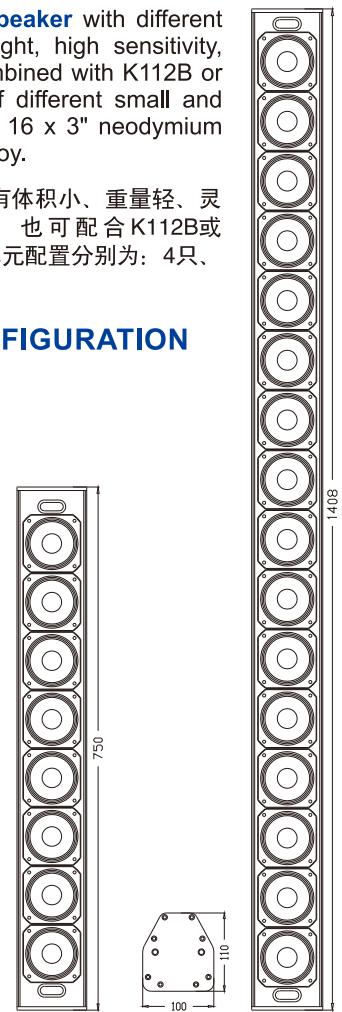


产品特征

- 体积小、重量轻
- 声音清晰、明亮
- 铝合金箱体
- 多种安装组合方式

适用范围

- 会议室，多功能厅、教堂、
- 小型流动商演

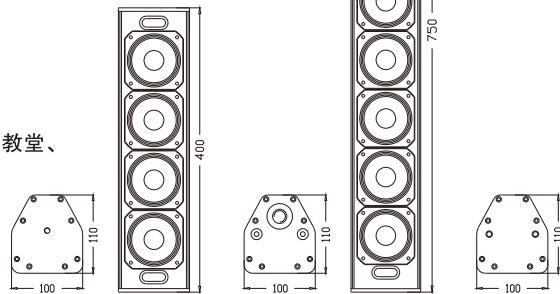

MODEL	K403	K803	K163
FREQUENCY RESPONSE(-3dB)	120Hz-18kHz	120Hz-18kHz	120Hz-18kHz
FREQUENCY RESPONSE(-10dB)	115Hz-20kHz	115Hz-20kHz	115Hz-20kHz
DRIVERS	4×3"(83mm)/0.8"voice coil Mid/High Unit	8×3"(83mm)/0.8"voice coil Mid/High Unit	16×3"(83mm)/0.8"voice coil Mid/High Unit
RATED POWER	100W RMS,400W peak	200W RMS,800W peak	400W RMS,1600W peak
SENSITIVITY	94dB 1watt/1meter	97dB 1watt/1meter	100dB 1watt/1meter
MAXIMUM SPL	114dB continuous,120dB peak	120dB continuous,126dB peak	126dB continuous,132dB peak
IMPEDANCE	16 ohms nominal	8 ohms nominal	4 ohms nominal
DISPERSION(-6dB)	70° horizontal	70° horizontal	70° horizontal
INPUT CONNECTORS	2× Speakon NL4	2× Speakon NL4	2× Speakon NL4
PACKAGE SIZE	285mm×210mm×465mm (1pair/carton)	840mm×340mm×195mm (1pair/carton)	1498mm×340mm×195mm (1pair/carton)
NET WEIGHT	2.7 kg/pc	4.7 kg/pc	8.8 kg/pc
GROSS WEIGHT	7 kg/pair	12 kg/pair	21 kg/pair