

# MRseries MR115/MR115N MR115A/MR115NA

## Two-way Loudspeaker System



pro audio

**MR115 is compact, small height size, coaxial, 15" two-way full range monitor series speaker with different configurations**, has balanced and real sound quality. Configuration: 1x15" high efficiency mid-bass unit and 1x1" exit throat 44mm voice coil HF driver with special designed horn. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint. The model with N is a neodymium magnetic unit, and the model with A is active.

MR115是不同配置，15"同轴结构设计的两分音舞台监听系列音箱，结构紧凑，高度尺寸小，音质平衡、真实。单元配置：1只15"高效率中低音单元和1只1"喉口44芯驱动器，配置专门设计的号角。箱体采用多层复合夹板，聚脲喷涂制作。型号带N为钕磁单元、型号带A为有源。



### FEATURES

- High quality components, high strength plywood housing
- Small height, take small space
- Can be placed on stage, can be hung
- Applications: Stage monitor


### 产品特点

- 高质量单元配置，高强度夹板箱体
- 高度尺寸小，占用空间小
- 可舞台摆放、可吊挂

### 适用范围

- 舞台监听

### CONFIGURATION

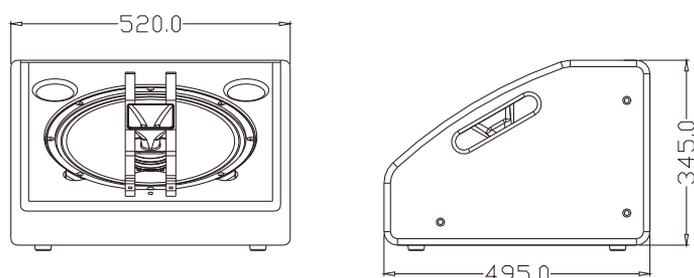

#### MODEL

**FREQUENCY RESPONSE(-3dB)**

**FREQUENCY RESPONSE(-10dB)**

**DRIVERS**

**RATED POWER**

**SENSITIVITY**

**MAXIMUM SPL**

**IMPEDANCE**

**DISPERSION(-6dB)**

**CROSSOVER FREQUENCIES**

**INPUT CONNECTORS**

**PACKAGE SIZE**

**NET WEIGHT**

**GROSS WEIGHT**

#### MR115/ MR115N

70Hz-18kHz

65Hz-20kHz

1×15"(385mm)/3"voice coil LF

1×1"(25mm)/1.7"voice coil HF

400W RMS,1600W peak

97dB 1watt/1 metre

124dB continuous,130dB peak

8 ohms nominal

70° × 40°

2.2kHz passive

2× Speakon NL4

610mm×460mm×635mm

26 kg/pc; 22 kg/pc

31 kg/pc; 27 kg/pc

#### MR115A/ MR115NA

70Hz-18kHz

65Hz-20kHz

1×15"(385mm)/3"voice coil LF

1×1"(25mm) / 1.7"voice coil HF

600W/8Ω

--

124dB continuous,130dB peak

--

70° × 40°

--

**INPUT TYPE:** Balanced Differential line

610mm×460mm×635mm

28 kg/pc; 24kg/pc

33 kg/pc; 29kg/pc